

### ELECTRIC SOLID TOP - COUNTERTOP





- External paneling in stainless steel
- Work surface in AISI 304, 1.2 mm thick
- Electric plate with 2 independent zones, each 2kW
- Extra-thick plate in 16M03 steel with smooth finish
- Work surface with perimeter liquid collection channel
- Removable plate, not built into the work surface
- Plate cooktop 300 x 500 mm
- Heating activated by thermostat with surface temperature regulation between 50°C and 400°C
- Heating with electric heating elements equipped with safety thermostat
- Ergonomic control panel with controls tilted toward the operator
- Indicator lights to monitor the correct operation of the appliance
- Height-adjustable stainless steel feet

#### TECHNICAL SPECIFICATIONS

Dimensions (mm)	400x700x250
Volume (m <sup>3</sup> )	0,20
Weight (kg)	50

#### ELECTRICAL CONNECTION

kW	4
Power supply	VAC 400/3N 50/60Hz
Cold water inlet	

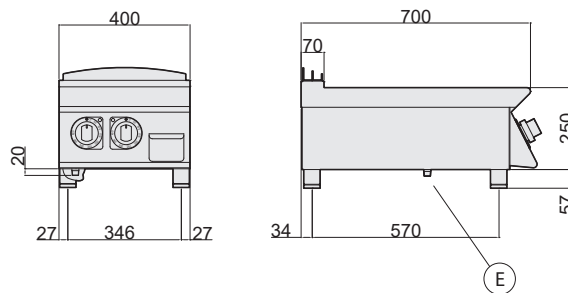

- Ⓐ water fill
- Ⓒ hot water fill
- Ⓔ electrical input
- Ⓕ cold water fill
- Ⓖ gas inlet
- Ⓗ water drain