


# Refrigerated and ventilated display case on refrigerated tank – with air curtain

- ▶ Stainless steel top AISI 304, th. 12/10
- ▶ Refrigerated laminar airflow in the tank and on all shelves
- ▶ Stainless steel height-adjustable blind bottoms (useful height 30-150 mm)
- ▶ Evaporator with anti-corrosion coating, which can be lifted to easily clean the well
- ▶ Condensed water drain on bottom (evaporation kit on request)
- ▶ Insulation by high density expanded polyurethane without C.F.C. and H.C.F.C.
- ▶ With condensing unit or pre-set for remote refrigeration
- ▶ Reverse cycle defrosting in plug-in displays
- ▶ Digital control system for temperature adjustment and defrosting
- ▶ Hinged doors on operator side to easily refill the display
- ▶ Air curtain on customer side to optimise the operating temperature
- ▶ LED lighting on the ceiling

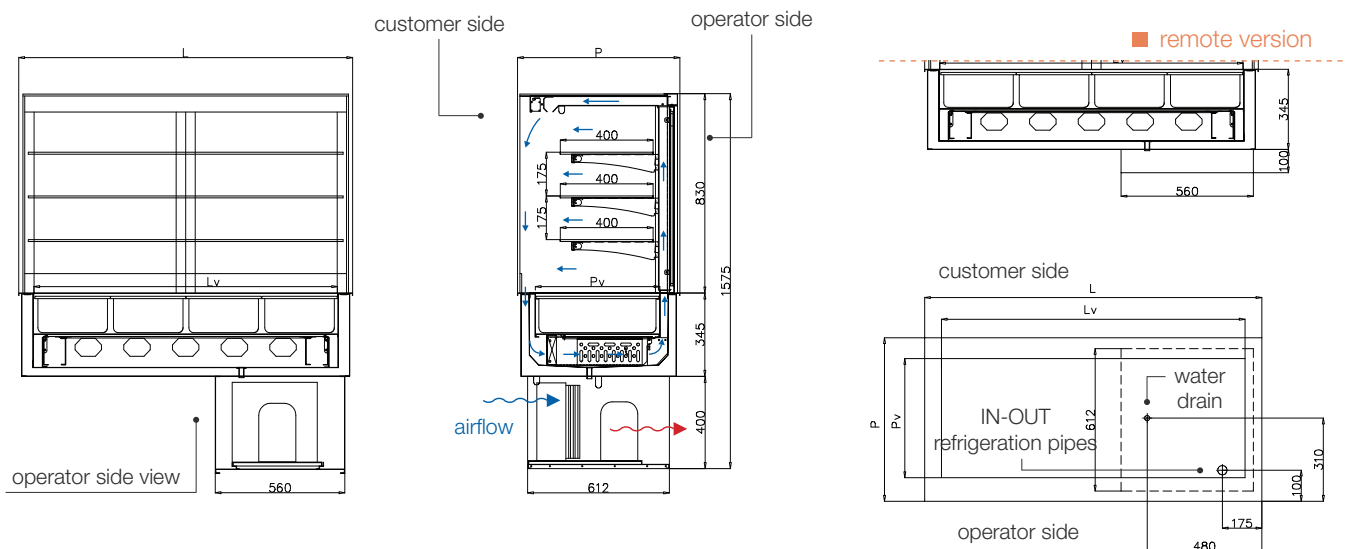

	2 GN1/1	3 GN1/1	4 GN1/1
External dimensions [mm] <b>LxP</b>	785x700	1110x700	1440x700
Well dimensions [mm] <b>LvxPvxHv</b>	650x540x150	980x540x150	1310x540x150
Capacity GN 1/1 containers	2 GN1/1	3 GN1/1	4 GN1/1
Temperature [C°] w/curtain	-1/+7*	-1/+7*	-1/+7*
Refrigerant gas	R404A	R404A	R404A
Cooling power at -10°C [W]	720	1100	1625
Total power [Kw]	0,6	0,9	1,2
Supply voltage (50Hz)	230V 1F+N	230V 1F+N	230V 1F+N
Diameter inlet gas pipe [mm]	6	6	10
Diameter outlet gas pipe [mm]	10	10	12