

GAS SOLID TOP - COUNTERTOP





- External paneling in stainless steel
- Work surface in AISI 304, 1.2 mm thick
- Extra-thick radiant plate with reinforcement for proper heat distribution, equipped with central cut-out
- Heating with high-power circular steel burner
- Reaches a temperature of 500°C at the centre of the plate and 200°C near the edges
- Complete with pilot burner and safety thermocouple
- Gas supply controlled by safety valve
- Automatic ignition with piezoelectric ignitor
- Plate dimensions 700 x 500 mm
- Ergonomic control panel with controls tilted toward the operator
- Height-adjustable stainless steel feet

TECHNICAL SPECIFICATIONS

Dimensions (mm)	800x700x250
Volume (m ³)	0,35
Weight (kg)	90

GAS CONNECTION

kW	12
UNI ISO 7/1 R 1/2"	
Cold water inlet	

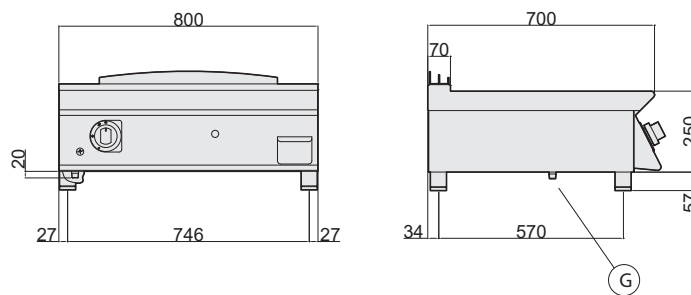

- Ⓐ water fill
- Ⓒ hot water fill
- Ⓔ electrical input
- Ⓕ cold water fill
- Ⓖ gas inlet
- Ⓗ water drain

