

FG7217T

17+17 Litre GAS FRYER



- · Unit made of steel throughout
- 1.2mm thick pressed top
- Height-adjustable steel feet
- Steel tanks with rounded corners and pressed bottom for ease of cleaning
- · Top with anti-drip edges
- · Wide cool zone in the bottom for collecting cooking debris
- Chrome-plated cast brass draining tap for oil drainage in the oil collector (fitted with filter) situated in the base
- · Heating elements protected by a pull-out chrome-plated grid
- High thermally efficient nickel-plated cast iron burners (approx.1 Kw/l) fitted with electrovalve.
- Thermostat temperature control (up to 190°C); fixed setting (230°C) safety thermostat to avoid overheating
- Bulbs protected for knock resistance
- · Features:
- 1 basket per tank in case of half module
- 3 baskets on single module (2 half- and one single basket)
- 1 oil collector for each appliance

General technical data

Dimensions: (mm) 800x700x900

Volume: (m³) **0,9**

Weight:: (Kg) 121

Gas connection

kW **33**


UNI ISO 7\1 R 1/2"


Electrical connection

kW **0,2**

Power supply

voltage 230V/1 50Hz

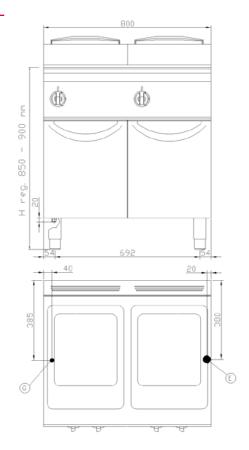



- (G) GAS INLET
- (E) ELECTRICAL PLUG
- (A) WATER INLET
- (C) HOT WATER INLET
- (F) COLD WATER INLET

(S) WATER DRAIN